

X810

bolle
SAFETY


LENS

- + PANORAMIC VISUAL FIELD
- + WATERPROOF OR ULTRA-VENTILATED VERSION
- + COATING ASAF  PLATINUM

**STRAP**

- + ADJUSTABLE STRAP
- + QUICK-RELEASE SYSTEM

BRIDGE

- + ADAPTED FOR AN OPTICAL INSERT

Spare lenses on option:



CSP



Smoke




RX Insert




120 g

+ Supplied with microfibre pouch around the strap and soft carry case (tan or black according to the version).

MODELS

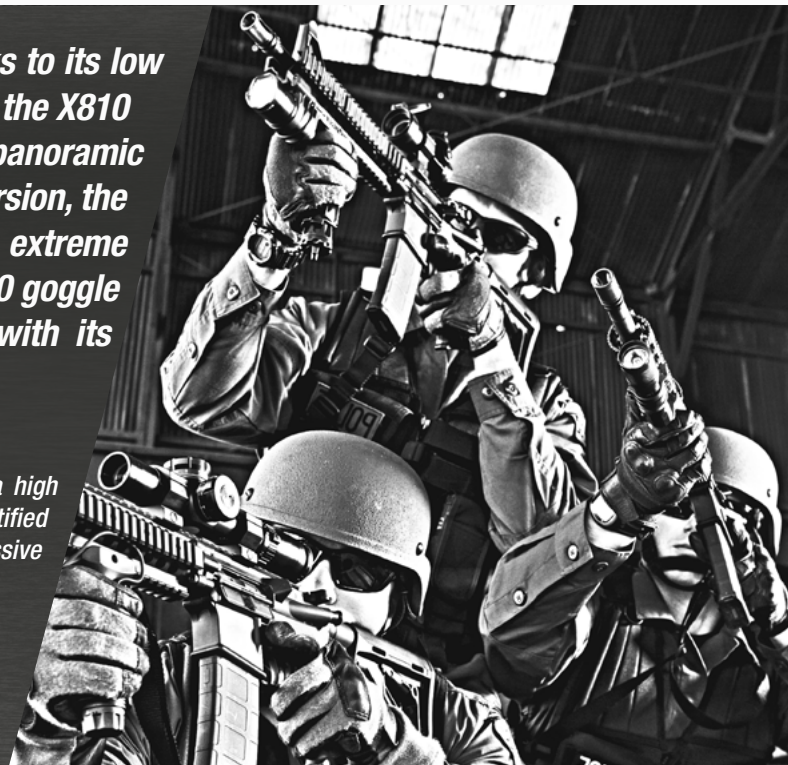
Compatible with all types of helmets thanks to its low profile shape and its quick-release system, the X810 offers an array of innovations. Compact, panoramic and modular, in waterproof or ventilated version, the X810 offers protection for the most extreme situations. In its ventilated version, the X810 goggle provides the best resistance to fogging with its  PLATINUM[®] coating.

 PLATINUM[®] (+P) ASAF Coating















Permanent coating on both sides of the lens gives them a high resistance to scratching, and delays the onset of fogging. Certified K & N (EN166) PLATINUM[®] resists to the most aggressive chemicals.

DESCRIPTION

TECHNOLOGIES



X810

MODEL	REFERENCE	VERSION	LENS MARKINGS	FRAME MARKINGS	V50 BALLISTIC RESISTANCE STANAG 2920	ANSI/MIL	COATING
X810	X810NPSI ■ Black	 Clear	2C-1.2  1 BT KN C€	 EN166 3 4 5 BT C€	900 km/h – 250 m/s	MIL-PRF-32432 ANSI Z87.1-2015 GL-PD-10-12	ASAF 
X810 ASIAN FIT	X810NPSIJP ■ Black	 Clear	2C-1.2  1 BT KN C€	 EN166 3 4 5 BT C€	900 km/h – 250 m/s	MIL-PRF-32432 ANSI Z87.1-2015 GL-PD-10-12	ASAF 
X810 Spare lens*	FAX810CSP	 CSP	5-1.4  1 BT KN C€	-	929 km/h – 258 m/s	ANSI Z87.1-2010	ASAF 
X810 Spare lens*	FAX810PSF	 Smoke	5-3.1  1 BT KN C€	-	929 km/h – 258 m/s	ANSI Z87.1-2010	ASAF 
X810 Optical Insert Kit	TACTICALRXKIT	RX insert					

Lens markings

Optical class symbols:

1. Continuous work

Mechanical strength symbols:

B. Medium energy impact, resists a 6 mm, 0.86 g ball at 120 m/s

T. The letter T, immediately after the mechanical strength symbol, authorises use for high speed particles at extreme temperatures.

Others symbols:

K. Resistance to surface damage by fine particles

N. Resistance to fogging

C€ European standard  Manufacturer name

Frame markings

Standards:

EN166. guaranteed minimum resistance of the protective eyewear against everyday risks including dropping the protective eyewear onto the ground, ageing by light exposure, exposure to heat or corrosion etc.

Mechanical strength symbols:

3. Liquid droplets or splashes

4. Large dust particles > 5 microns

5. Gas and fine dust particles < 5 microns.

B. Medium energy impact, resists a 6 mm, 0.86 g ball at 120 m/s

T. The letter T, immediately after the mechanical strength symbol, authorises use for high speed particles at extreme temperatures.

Others symbols:

C€ European standard  Manufacturer name

Bollé Safety product approval certificates to CE standards will be sent on request.

	X810NPSI	X810NPSIJP	FAX810CSP	FAX810PSF
EAN13 Unit pack	3660740006808	4580279034778	3660740207991	3660740006846
EAN13 Inner pack (number of unit per inner pack)	-	-	-	-
Size // Weight Inner pack	-	-	-	-
EAN13 Master (number of unit per master pack)	3660740206802 (60 units)	4580279034778 (60 units)	3660740207991 (180 units)	3660740206840 (180 units)
Size // Weight Master pack	60x50x40 cm 17.9 kg	60x50x40 cm 17 kg	47x37x30 cm 10.10 kg	47x37x30 cm 10.10 kg

Maintenance: Pitted, scratched or damaged lenses must be replaced by replacing the complete product. If the frame is damaged also replace the complete product.

After each use it is recommended to keep the spectacles or goggles in a microfiber pouch or rigid case.

Storage: All products must be stored in a dry and clean environment.

X810	
Lens	PC - 3 mm - Curve 9
Frame	PC + TPR
Strap	Adjustable 35 mm
Spare lens	-
Country of origin	Taiwan

For more information on this product and the BSSI range, visit:

www.bollesafety-si.com

BOLLÉ SAFETY

34 rue de la Soie
69100, Villeurbanne
FRANCE